

Charact. curves acc. **DIN EN ISO 9906:2013.03 3B**  
Admissible minimum capacity  $0.1 \cdot Q(\text{opt})$  at continuous operation  
Remarks:

Item:  
Pos.No:

Created by  
GREE

Date  
**2015-02-16**





Power data referred to:

Water, pure

| Q  | H | P | Vis                    | Temp    | Density                 | rated Torque |
|----|---|---|------------------------|---------|-------------------------|--------------|
| 1) |   |   | 1,0 mm <sup>2</sup> /s | 20,0 °C | 1,00 kg/dm <sup>3</sup> |              |
| 2) |   |   |                        |         |                         |              |

**Speed**  
**1450 1/min**

NPSH-value without safety margins

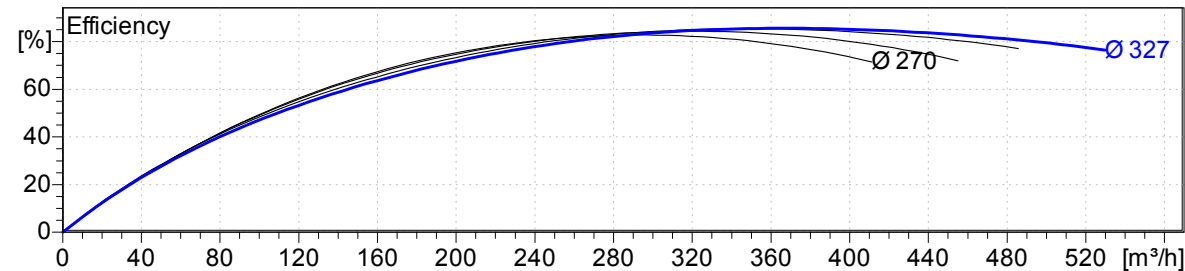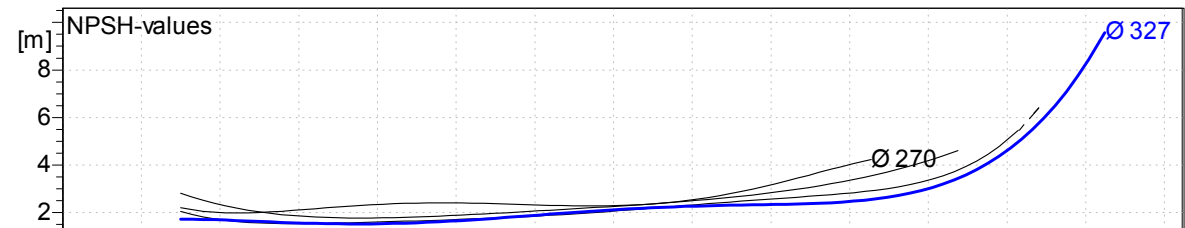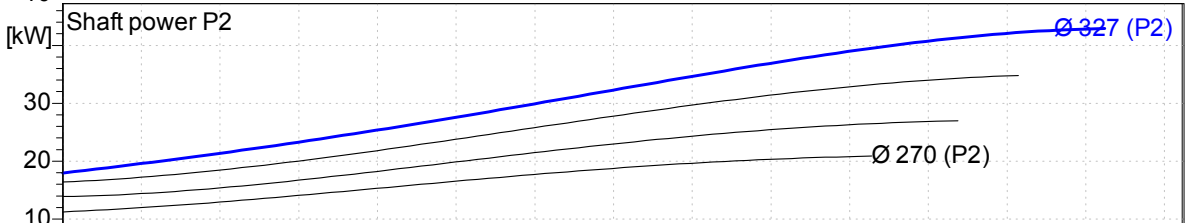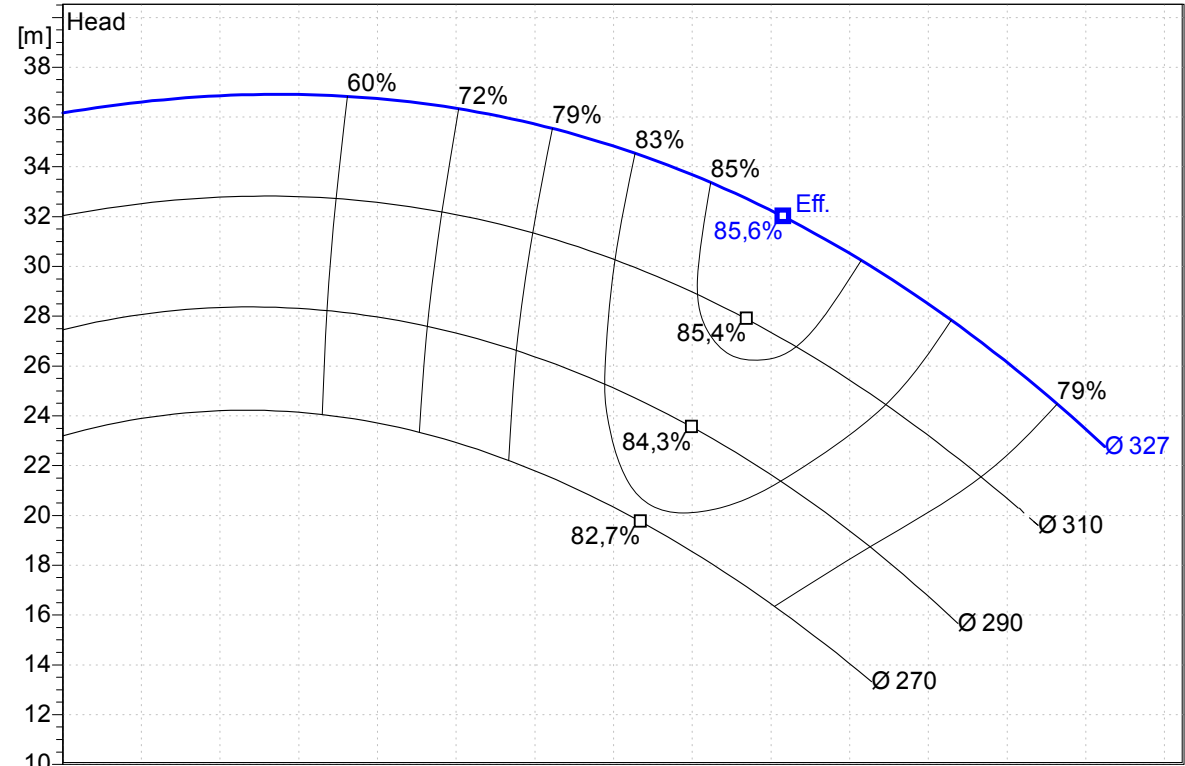

Flow