

Charact. curves acc. **DIN EN ISO 9906:2013.03 3B**  
Admissible minimum capacity 0.1 \* Q(opt) at continuous operation  
Remarks:

Item:  
Pos. No:

MEI value is valid for max. impeller diametre, the smaller diameters are trimmed.

Created by  
GR-EE

Date  
**2015-07-09**





Power data referred to:

Water, pure

Q	H	P	Vis 1,0 mm <sup>2</sup> /s	Temp 20,0 °C	Density 1,00 kg/dm <sup>3</sup>	rated Torque
1)						
2)						

**Speed**  
**1450 1/min**

NPSH-value without safety margins

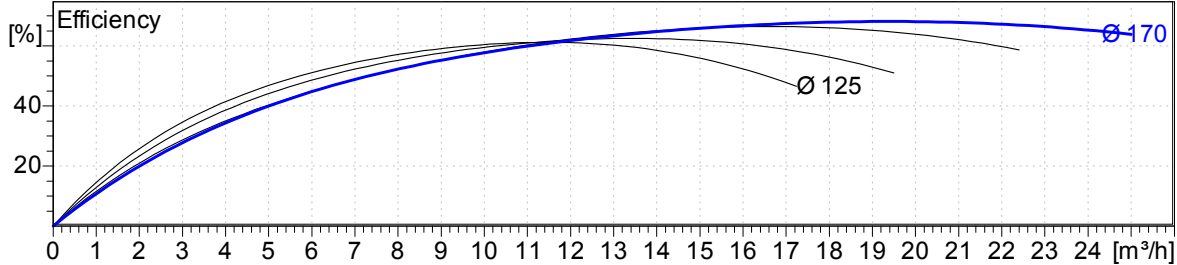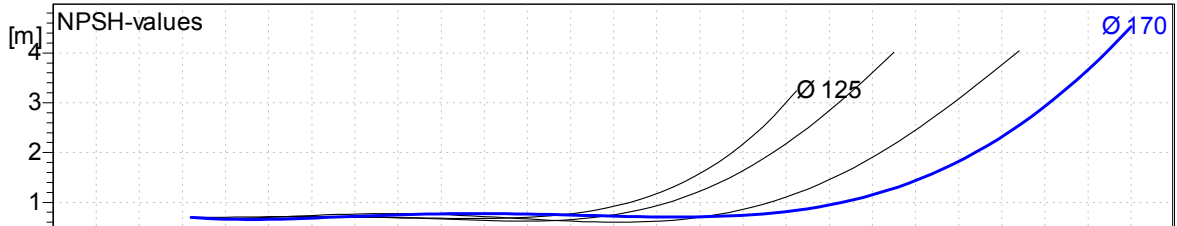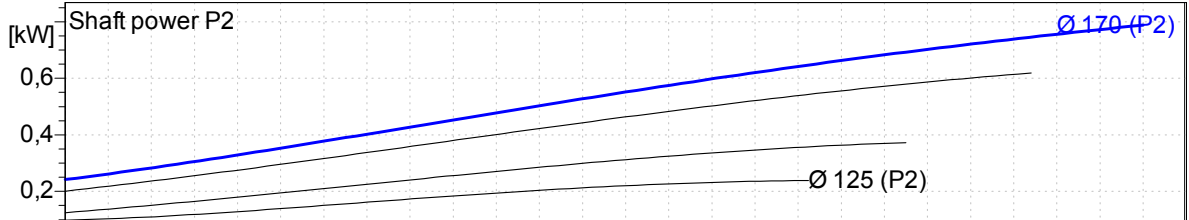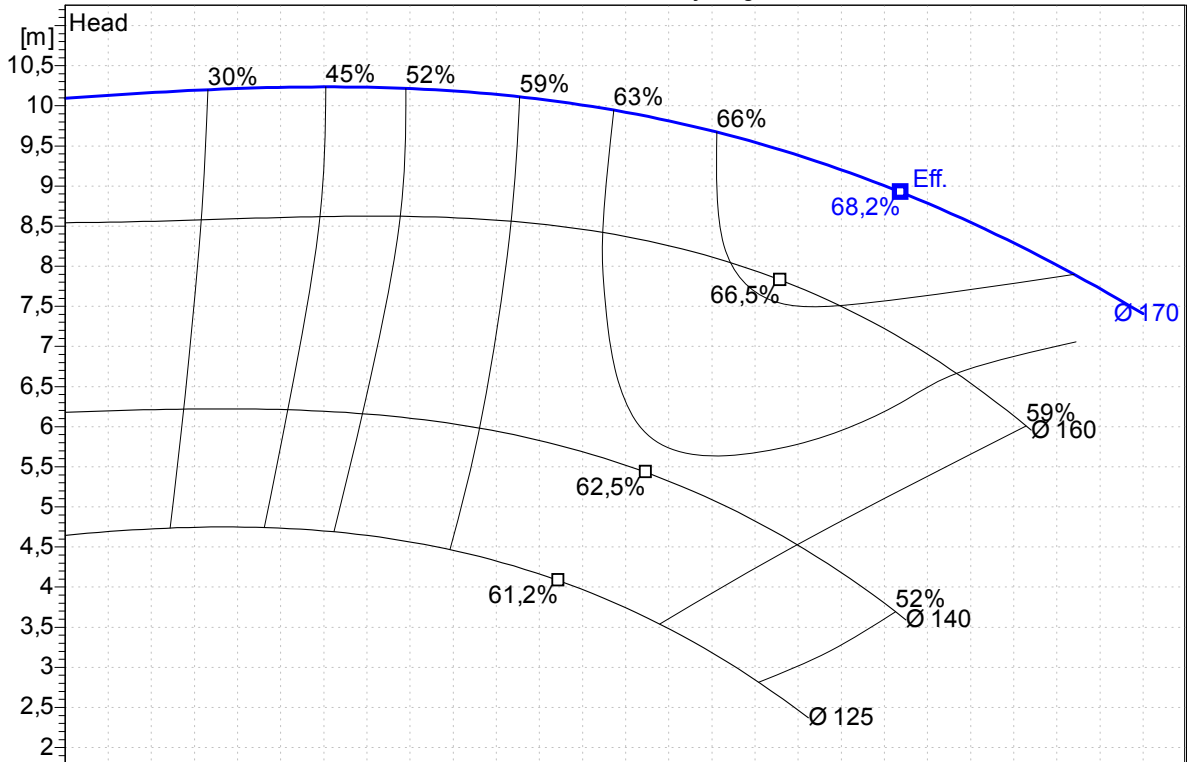

Flow

Charact. curves acc. **DIN EN ISO 9906:2013.03 3B**  
Admissible minimum capacity 0.1 \* Q(opt) at continuous operation  
Remarks:

MEI value is valid for max. impeller diametre, the smaller diameters are trimmed.





Power data referred to:

Water, pure

Q	H	P	Vis 1,0 mm <sup>2</sup> /s	Temp 20,0 °C	Density 1,00 kg/dm <sup>3</sup>	rated Torque
1)						
2)						

**Speed**  
**2900 1/min**

NPSH-value without safety margins

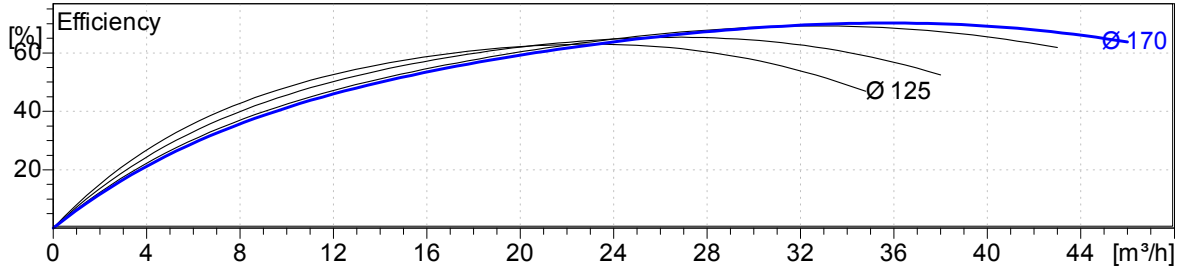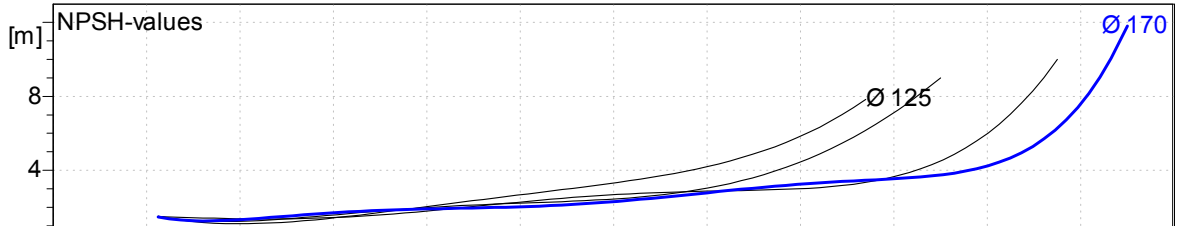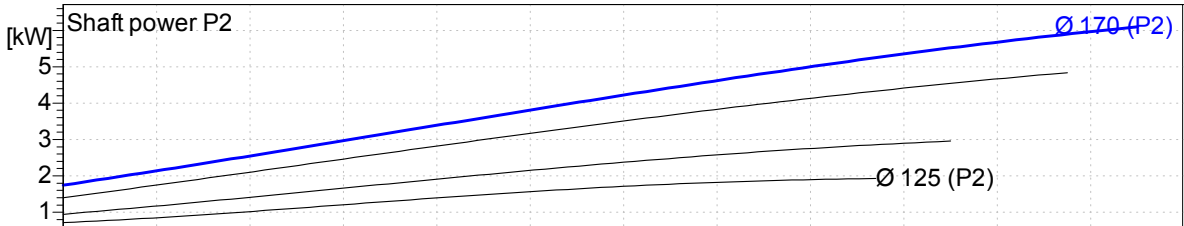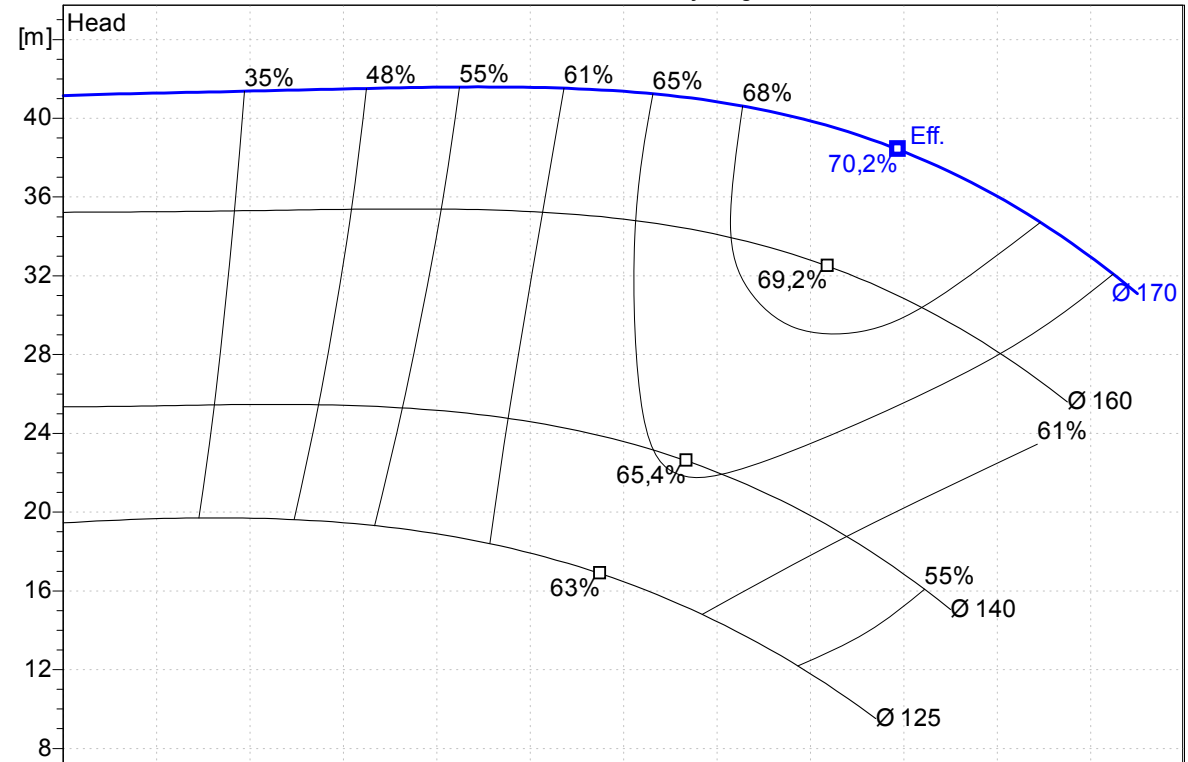

Flow