

Charact. curves acc. **DIN EN ISO 9906** Class 2
Admissible minimum capacity 10 % * Q(opt) at continuous operation
Remarks:

Item:
Pos.No:

Created by
GR-B, -





Date
2012-12-11

Power data referred to: **Water, pure**

Q	H	P	Vis 1,0 mm ² /s	Temp 20,0 °C	Density 1,00 kg/dm ³	rated Torque
1)						
2)						

Speed
1450 1/min

NPSH-value without safety margins

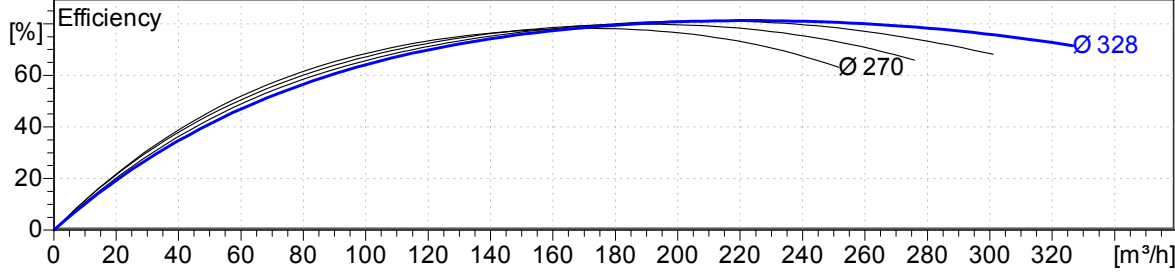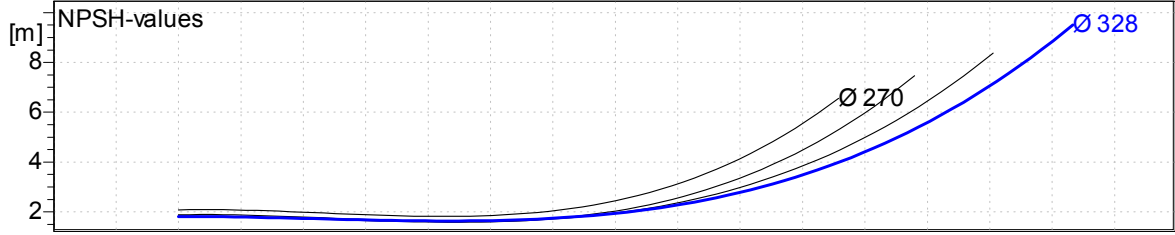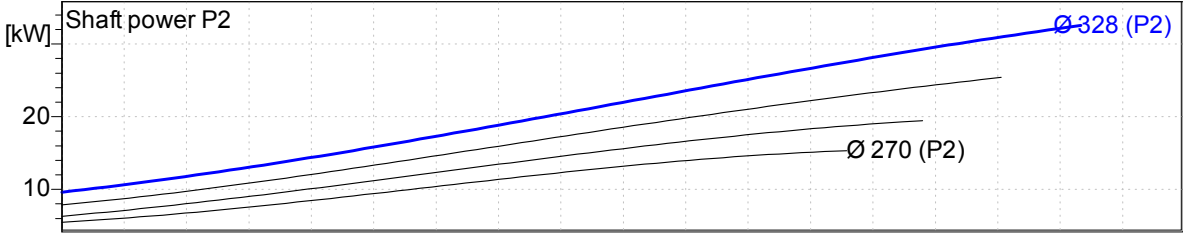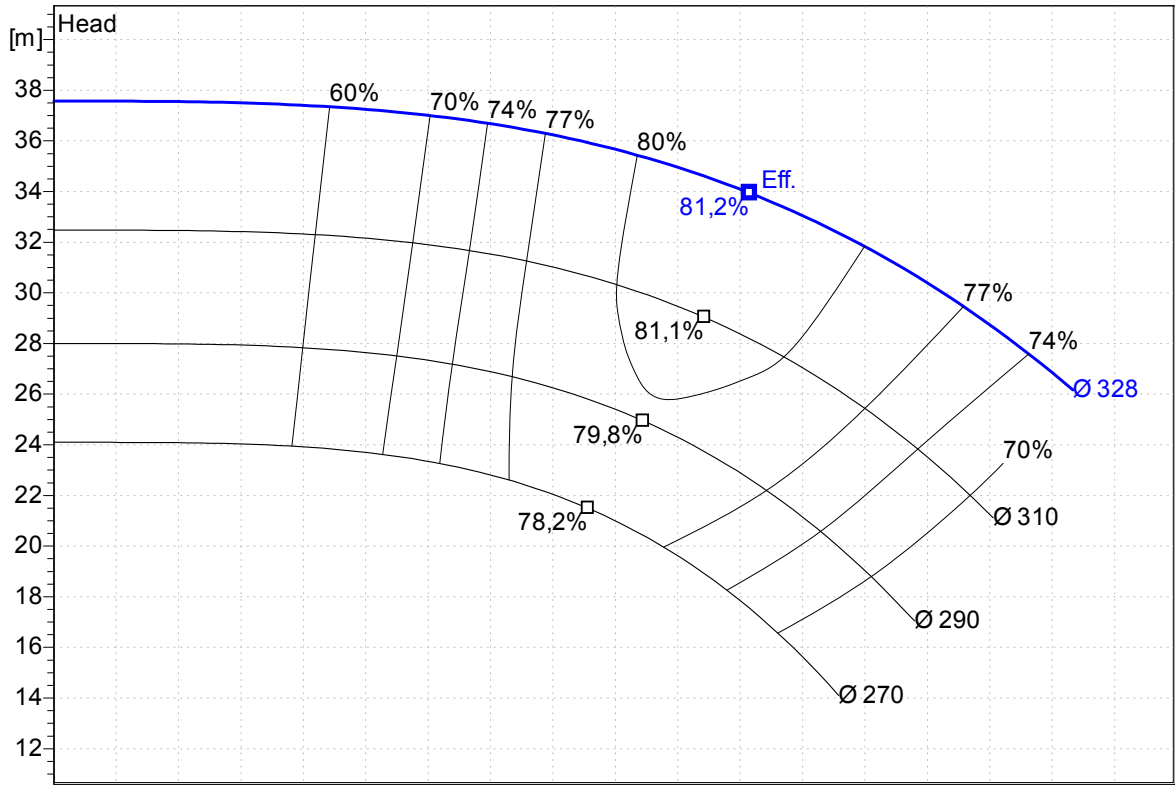

Flow