

Charact. curves acc. **DIN EN ISO 9906:2013.03 3B**  
Admissible minimum capacity 0.1 \* Q(opt) at continuous operation  
Remarks:

Attention! Impeller is turned down on angle at diameter D<=334 mm acc. document 134-190.  
MEI value is valid for max. impeller diameter, the smaller diameters are trimmed.

Item:  
Pos.No:

Created by  
GR-EE

Date  
**2015-04-15**





Power data referred to:

Water, pure

Q	H	P	Vis	Temp	Density	rated Torque
1)			1,0 mm <sup>2</sup> /s	20,0 °C	1,00 kg/dm <sup>3</sup>	
2)						

**Speed**  
**1450 1/min**

NPSH-value without safety margins

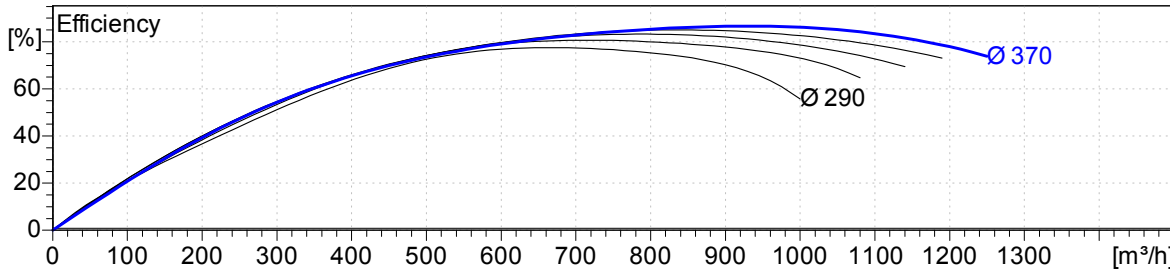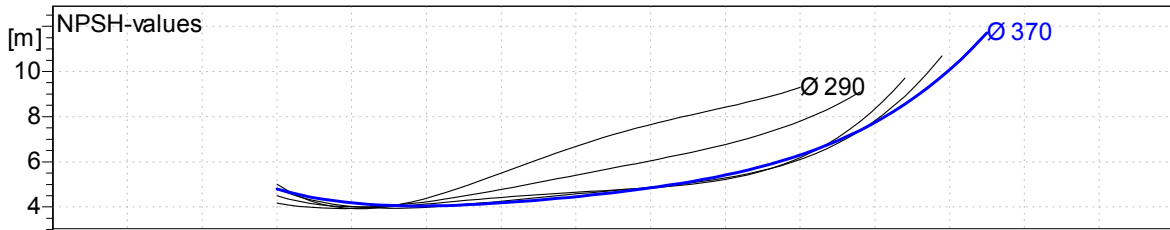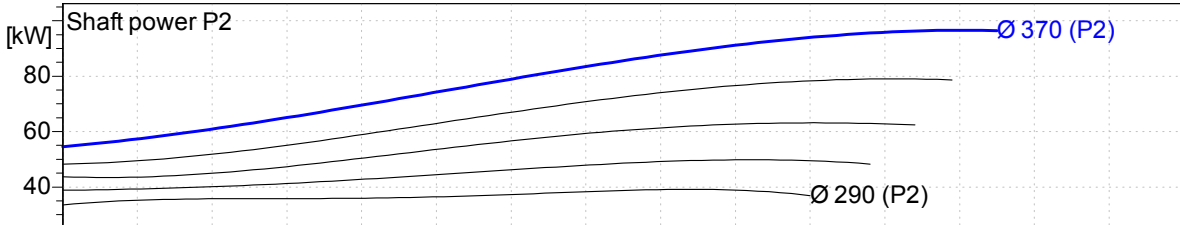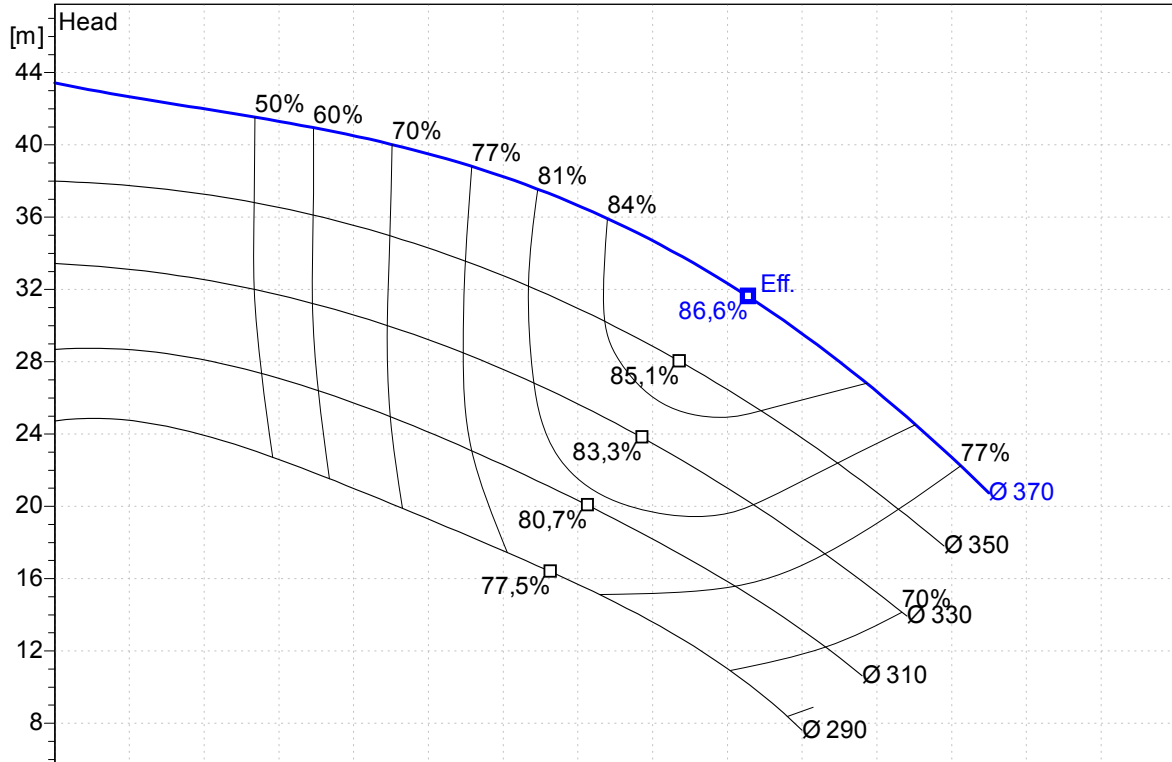

Flow