

Charact. curves acc. **DIN EN ISO 9906:2013.03 3B**
Admissible minimum capacity $0.1 \cdot Q(\text{opt})$ at continuous operation
Remarks:

Item:
Pos.No:

Created by
GR-B

Date
2014-10-22


Power data referred to:

Water, pure

Q	H	P	Vis 1,0 mm ² /s	Temp 20,0 °C	Density 1,00 kg/dm ³	rated Torque
1)						
2)						

Speed
1450 1/min

NPSH-value without safety margins

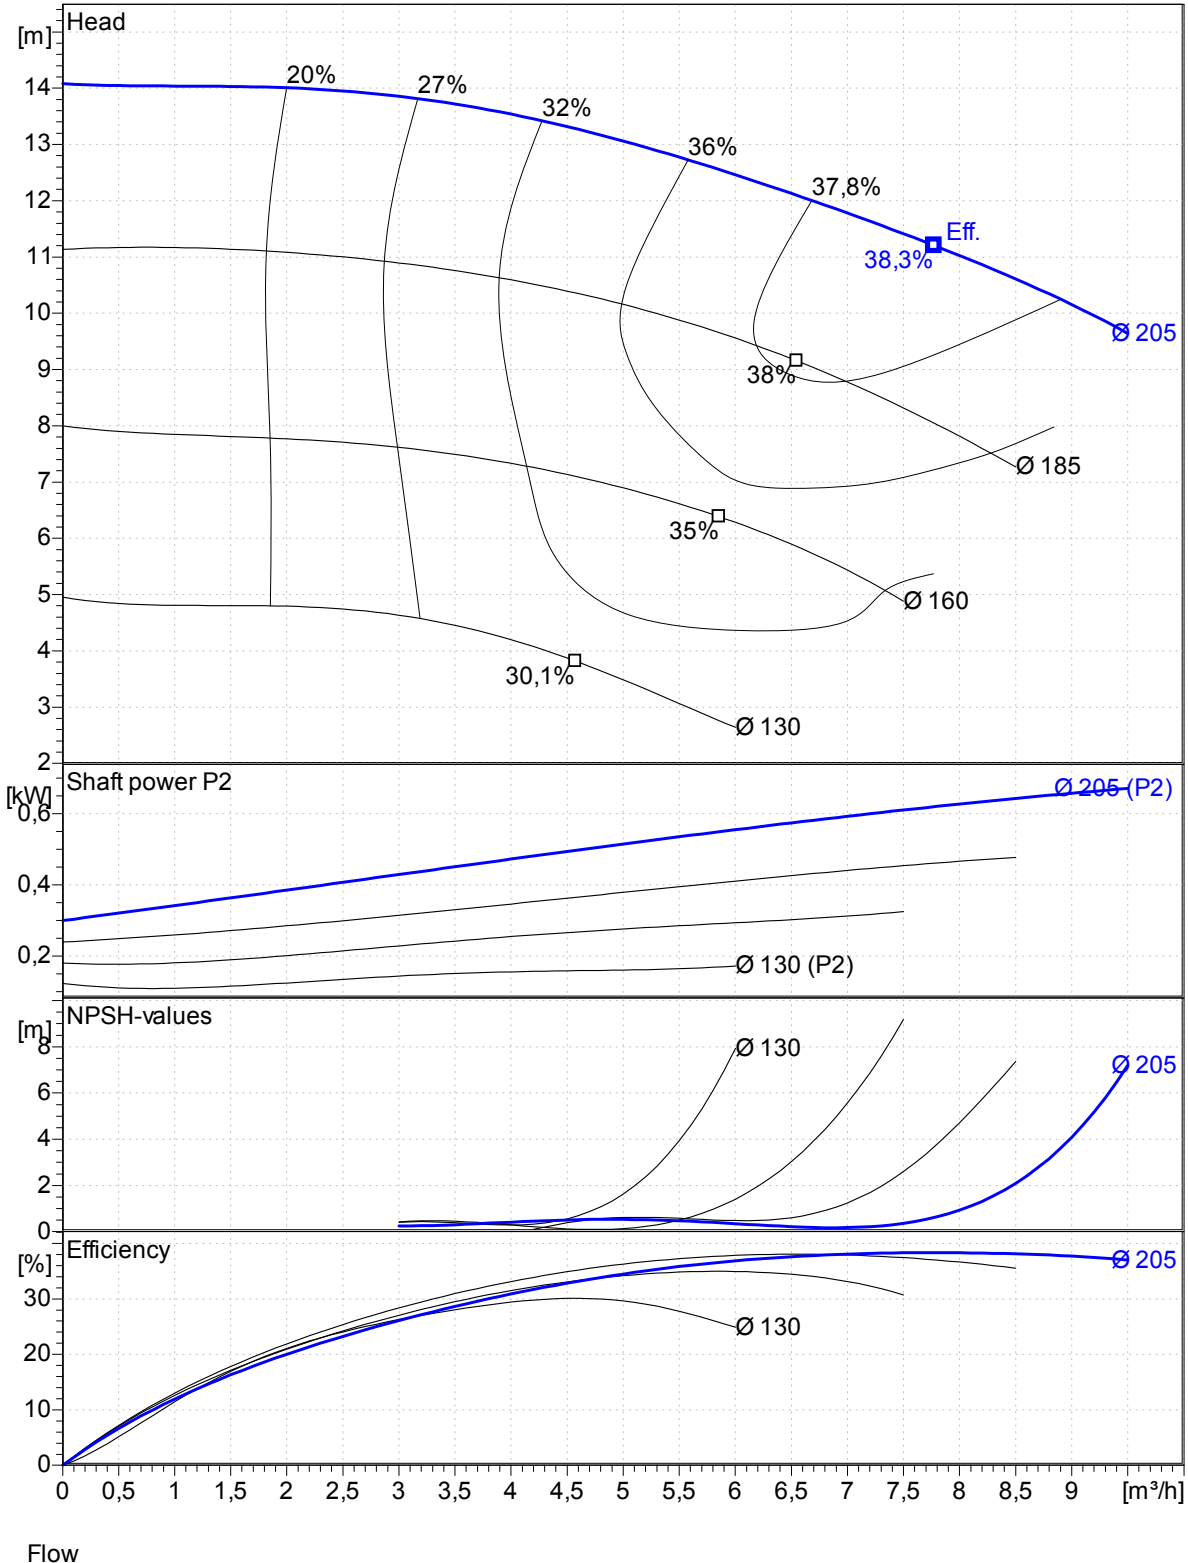

Charact. curves acc. **DIN EN ISO 9906:2013.03 3B**
Admissible minimum capacity 0.1 * Q(opt) at continuous operation
Remarks:

Item:
Pos.No:

Created by
GR-B

Date
2014-10-22

Power data referred to:

Water, pure

Q	H	P	Vis	Temp	Density	rated Torque
1)			1,0 mm ² /s	20,0 °C	1,00 kg/dm ³	
2)						

Speed
2900 1/min

NPSH-value without safety margins

